

AURA

The majestic wooden parasol



Glatz 

Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame eucalyptus wood
	cm		
<input type="checkbox"/>	350×350	8 parts	111 00 351 751
	400×400	8 parts	111 00 401 751

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height/Crank open	Crack height	Height of pole	Length of free-arm	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A		M ²	B	E	F	G ¹ /G ²	D	M ²	Z	C		
350×350	-	8.8×14	12.3	45	220	297/275	62	279	195	80×80	310	45 (6)
400×400	-	8.8×14	16	18	220	305/285	62	287	220	100×100	310	40 (6)



The measurements specified are calculated average values and may differ slightly in the product ($\pm 2\% \pm 5$ cm).

The height measurements are based on the M4 ground socket. These deviate insignificantly between base versions.

The maximum permissible wind speed in accordance with the table applies for a horizontally positioned canopy and requires fixed anchorage to the ground. A base with the specified minimum weight is not sufficient.

For multiple parasols, a minimum distance of 20 cm between two parasols, as well as to walls, should be maintained.

Opening and closing using a battery-operated drill is not permitted.

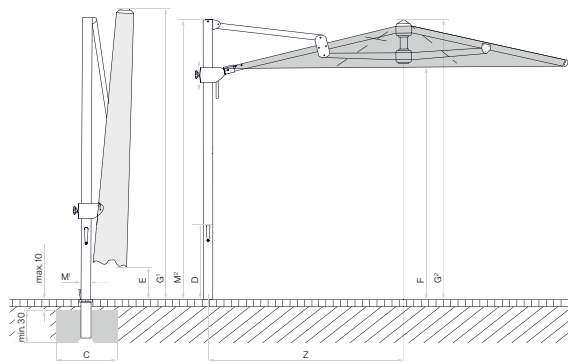

8 parts

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth),
Guarantee water drainage

Accessories

Absolutely
necessary

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod for the Aura, 350 × 350 cm	350 01 609 731
1	Protective cover with zip and rod for the Aura, 400 × 400 cm	350 01 609 741

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100

Fixations

Ground sockets

4	Ground socket M4, hot-dip galvanised steel	350 01 226 510
---	--	----------------

Mounting plates

5	Mounting plate M4 / M8, 30 × 30 × 1.5 cm, hot-dip galvanised steel	350 01 226 921
6	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	350 01 226 932
7	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	350 01 226 930
	Mounting plate M4 for isolated grounds, installation height made to measure, high-grade steel 1.4301 / 304	350 01 229 730

Bases

8	Base frame M4 / M8 / M16, 240-690 kg, 105 × 105 × 12–16 cm, hot-dip galvanised steel, adjustable and levellable (price without concrete elements)	350 01 226 945
	Concrete element set, 4 × 65 kg, for 310 kg base, 48.3 × 48.3 × 12.6 cm, (approx. 260 kg), concrete	350 01 226 952
9	Cover for M4 / M8 / M16 base 310 kg, 110 × 110 × 15 cm, aluminium, powder coated light grey	350 01 227 517
10	Cover for M4 / M8 / M16 base 310 kg, 110 × 110 × 15 cm, aluminium, powder coated anthracite	350 01 227 530



1



2



3



4



5



6



7



8



9




10



Frame	<p>8 parts</p> <p>Crank drive for opening and closing (removable crank)</p> <p>360° ball-bearing swivel mechanism with locking lever on the mast</p> <p>Premium varnished eucalyptus wood, with stabilising aluminium core, ribs made from eucalyptus wood, silver powder-coated stainless steel and aluminium components</p> <p>Function: Parasol roof tiltable against the mast</p> <p>Frame roof: square</p>
Frame colour	Colourless-varnished eucalyptus wood
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 %
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyron Spot LED with integrated battery pack



Using Locations



Fixations



AURA
© Int. Design reg.

Valid from 1.1.2024
glatz.com