

SUNWING® Casa



01/2026 en - 259 420 01 531 © by Glatz AG

SUNWING® Casa

The handy all-round parasol



> 98 %
UV
Protection



Frame	8 ribs Aluminium Mast profile round 55 x 2.5 mm Crank housing, support arm guide and head made from robust die-cast aluminium Screws and rivets made from stainless steel
Function	Crank drive for opening and closing Crank for stepless tilting of roof in both directions (45°)
Frame colour	Natural anodised aluminium or anthracite powder-coated aluminium
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m ² , UV protection > 98 % Fabric Quality 2: polyester, 220 g/m ² , UV protection > 98 %, (only in anthracite frame) Self-tensioning through flexible rib ends
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyrion Spot LED with integrated battery pack



Usage locations



Fixation



SUNWING® Casa
© Int. Design reg.

Valid from 1.1.2026
glatz.com



Assortment

Frame aluminium

Shape	Nominal size	Number of ribs	Order no. anodised natural	Order no. anthracite powder-coated
	cm			
○	Ø 300	8	056 00 300 171	056 00 300 301
	Ø 330	8	056 00 330 171	056 00 330 301
□	270 x 270	8	056 00 271 171	056 00 271 301
□	300 x 240	8	056 00 302 171	056 00 302 301

Nominal size	Lateral distance	Mast Ø	Area covered	Crank handle height	Height closed	Clear headroom	Total height / open	Height open	Overhang at the back	Length of free-arm	Founda-tion	Minimum weight for base	Max. wind speed open
A	AS	M	D / D'	E	F	G / G'	H	N	Z	C		kg	km/h (Bft.)
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	cm	cm	kg	km/h (Bft.)
Ø 300	276	5.5	6.4	125 / 195	75	205	265 / 245	255	35	160	60 x 60	90	35 (5)
Ø 330	305	5.5	7.7	125 / 195	60	205	265 / 245	255	35	160	60 x 60	90	30 (5)
270 x 270	-	5.5	7.3	125 / 195	35	205	265 / 245	255	35	160	60 x 60	90	30 (5)
300 x 240	-	5.5	7.2	125 / 195	35	205	265 / 245	255	35	160	60 x 60	90	35 (5)


The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The measures of the height are determined by the PX ground socket. If one of the offered bases is used, these measures change only slightly.


With the base variant these vary slightly. With the variants with the ground sockets M4 and mounting plate M4 / M8, the stated height dimensions vary by 12–13 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

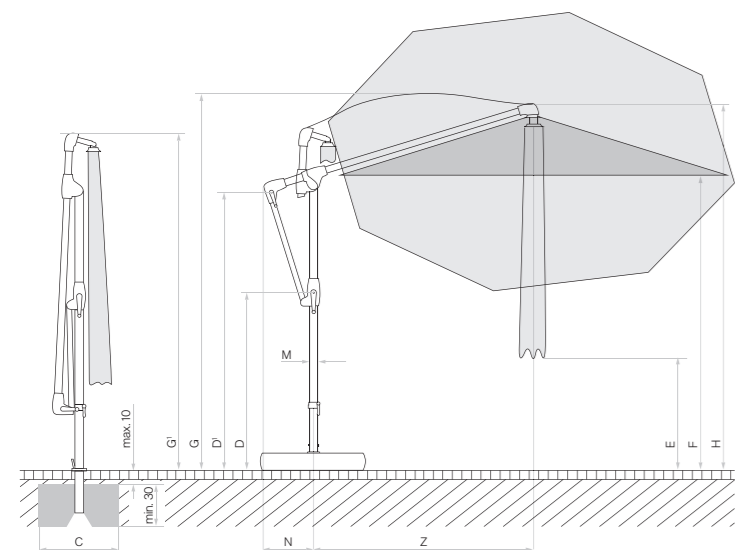

Loose cover max. 10 cm,
concrete thickness min. 30 cm (pay attention to frost depth),
guarantee water drainage

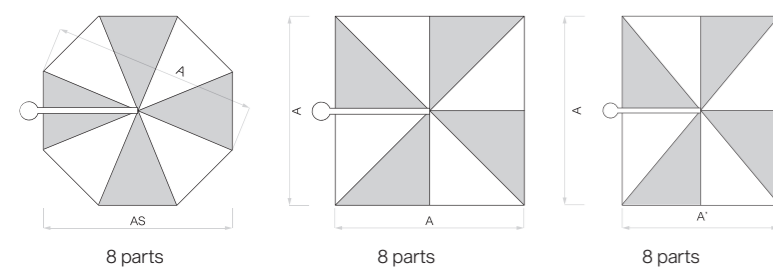

Accessories SUNWING® Casa

Protective cover	Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric		
1 Protective cover with zip and rod		350 01 609 702
5 pieces, protective cover with zip and rod		350 01 609 703

Accessories

Electrical accessories	Absolutely necessary	Order no.
2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Accessories SUNWING® Casa

Fixations	Absolutely necessary	Order no.
Ground sockets		
4 Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4 Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011
5 Ground socket M4, hot-dip galvanised steel	Support tube M4	350 01 226 510

Mounting plates	Absolutely necessary	Order no.
6 Mounting plate M4 / M8, 30 x 30 x 1.5 cm, hot-dip galvanised steel	Support tube M4	350 01 226 921
7 Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4	350 01 226 932
8 Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4	350 01 226 930
9 Mounting plate M4 for high insulation (50-350 mm), installation height (50-350 mm) made to measure (higher on request), hot-dip galvanised steel	Support tube M4	350 01 222 510

Wall consoles	Absolutely necessary	Order no.
10 Wall console M4, extension 480 mm, hot-dip galvanised steel	Support tube M4	350 01 229 405

Bases	Absolutely necessary	Order no.
11 Concrete base Z, 90 kg, Ø 75 x 11 cm, light concrete	Support tube Z	350 01 111 416
1 pallet (10 pieces) concrete base Z, 90 kg, Ø 75 x 11 cm, light concrete	Support tube Z	350 01 112 416
12 Base frame M4, 120 kg, (for 8 plates 40 x 40 x 4 cm), 91 x 91 x 11.5–15.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4	350 01 108 235
Slab set, 8 pieces, 40 x 40 x 4 cm, (approx. 110 kg), concrete		350 01 226 908
Slab set, 8 pieces, 40 x 40 x 4 cm, (approx. 115 kg), 4 pieces concrete, 4 pieces in granite-look		350 01 226 909
13 Cover for M4 base 120 kg, 96 x 96 x 11.5 cm, plastic ABS coated, anodised aluminium look		350 01 100 617
14 Cover for M4 base 120 kg, 96 x 96 x 11.5 cm, plastic ABS coated, anthracite		350 01 100 630
15 ³⁴ Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
16 Natural granite base Z, 90 kg, 75 x 75 x 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 436
17 ³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel		350 01 109 487
17 ³⁴ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 109 486

Bases with castors	Absolutely necessary	Order no.
18 ^{3,7} Base with castors Z, 90 kg, 80 x 80 x 11 cm, light concrete NEW	Support tube Z	350 01 113 400
^{3,7} 1 pallet (5 pieces) base with castors Z, 90 kg, 80 x 80 x 11 cm, light concrete NEW	Support tube Z	350 01 113 480
19 ^{1-3,7} Base frame with castors M4, 90/120 kg, 80 x 80 x 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Container Set/Weight Set + Support tube M4 + decorative plate	350 01 113 610
20 ^{3,7} Base frame with castors M4, 90/120 kg, 80 x 80 x 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Container Set/Weight Set + Support tube M4 + decorative plate	350 01 113 620
Weight Set for base with castors M4, 90/120 kg, 4 pieces, concrete, (Weight Set approx. 90 kg)		350 01 110 500
Container Set for base with castors M4, 90/120 kg, 4 pieces, plastic, (filled approx. 56 kg)		350 01 110 550
21 ¹ Decorative plate in grey white RAL 9002 for base with castors M4, 90/120 kg, aluminium composite		350 01 113 710
22 Decorative plate in anthracite RAL 7016 for base with castors M4, 90/120 kg, aluminium composite		350 01 113 720

Support tubes/connection tubes	Absolutely necessary	Order no.
23 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
23 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
23 Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
24 Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 200 035
24 Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 200 082
25 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
26 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
25 Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹while stocks last

²only suitable for smooth, joint free surface coverings

⁶not suitable for cover for M4 base

⁷90 kg: Ground clearance 7 mm, 90/120 kg: Ground clearance 13 mm

⁸suitable for corrosive environments

